



# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

## HIGH PERFORMANCE POLYAMIDE RESIN

Zytel® HTNFR52G35NHF BK337 is a 35% Glass Reinforced, Flame Retardant, Non-Halogenated, PPA, High Performance Polyamide with Improved Flow

### Product information

Resin Identification	PA(6T/66)-GF35FR(40)	ISO 1043
Part Marking Code	>PA(6T/66)-GF35FR(40)<	ISO 11469
Part Marking Code	>PPA-GF35FR<	SAE J1344
ISO designation	ISO 16396-PA6T/66,GF35 FR(40),M1CF1G,S10-120	

### Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	0.3/-	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.9/-	%	ISO 294-4, 2577

### Typical mechanical properties

	dry/cond.		
Tensile Modulus	12800/-	MPa	ISO 527-1/-2
Stress at break	135/-	MPa	ISO 527-1/-2
Strain at break	1.4/-	%	ISO 527-1/-2
Flexural Modulus	11200/-	MPa	ISO 178
Flexural Strength	200/-	MPa	ISO 178
Charpy notched impact strength, 23°C	8/-	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	8/-	kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.33/-	-	

### Thermal properties

	dry/cond.		
Melting temperature, first heat	310/*	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	283/*	°C	ISO 75-1/-2
RTI, electrical, 0.75mm	140	°C	UL 746B
RTI, electrical, 1.5mm	140	°C	UL 746B
RTI, electrical, 3mm	140	°C	UL 746B
RTI, impact, 0.75mm	115	°C	UL 746B
RTI, impact, 1.5mm	115	°C	UL 746B
RTI, impact, 3mm	120	°C	UL 746B
RTI, strength, 0.75mm	125	°C	UL 746B
RTI, strength, 1.5mm	125/*	°C	UL 746B
RTI, strength, 3mm	130	°C	UL 746B



# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

## HIGH PERFORMANCE POLYAMIDE RESIN

### Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	V-0/*	class	IEC 60695-11-10
Thickness tested	1.5/*	mm	IEC 60695-11-10
UL recognition	yes/*	-	UL 94
Burning Behav. at thickness h	V-0/*	class	IEC 60695-11-10
Thickness tested	0.75/*	mm	IEC 60695-11-10
UL recognition	yes/*	-	UL 94
Oxygen index	33/*	%	ISO 4589-1/-2
Glow Wire Flammability Index, 0.75mm	960/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	960/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	960/-	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	775/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	775/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	850/-	°C	IEC 60695-2-13
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)

### Electrical properties

	dry/cond.		
Relative permittivity, 100Hz	4.3/-	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.9/-	-	IEC 62631-2-1
Dissipation factor, 100Hz	50/-	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	110/-	E-4	IEC 62631-2-1
Electric strength	31/-	kV/mm	IEC 60243-1
Comparative tracking index	600/-	-	IEC 60112
Comparative tracking index, 3.0mm	0/-	PLC	UL 746A
Dielectric Constant, 1 GHz	3.9/-	-	ASTM D 2520 B
Dielectric Constant, 10 GHz	3.9/-	-	ASTM D 2520 B
Dissipation Factor, 1 GHz	110/-	E-4	ASTM D 2520 B
Dissipation Factor, 10 GHz	104/-	E-4	ASTM D 2520 B

### Other properties

	dry/cond.		
Density	1490/-	kg/m <sup>3</sup>	ISO 1183

### Injection

Drying Recommended	yes
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	6 - 8 h
Processing Moisture Content	≤0.1 %
Min. melt temperature	320 °C
Max. melt temperature	325 °C
Min. mould temperature	90 °C
Max. mould temperature	130 °C



# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

## Characteristics

Additives

Flame retardant

## Additional Information

Injection molding


For molding machine components, use corrosion resistant and wear resistant steel. For details please contact your DuPont representative. Limit the residence time of the resin in the machine. Use proper protective equipment and adequate ventilation.



# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

## Stress-strain (dry)

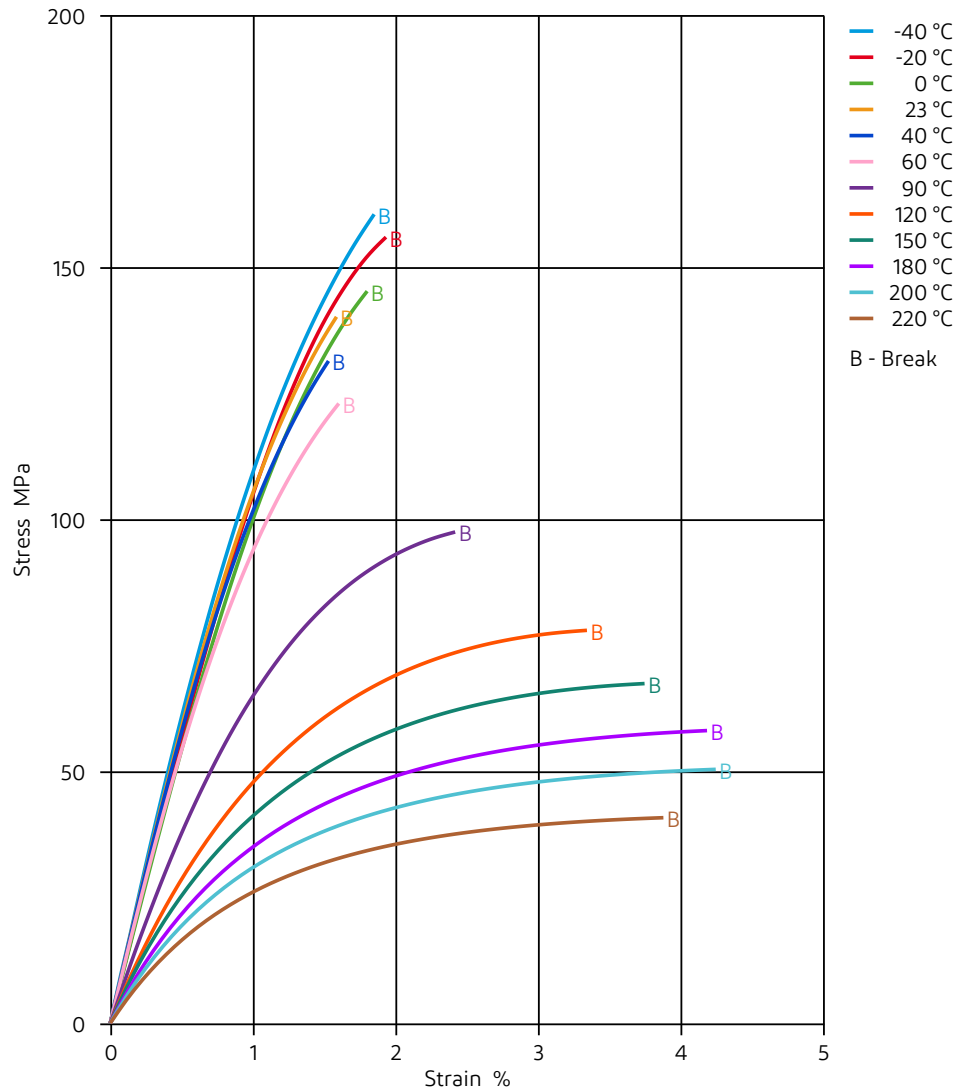




# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

## Stress-strain (cond.)

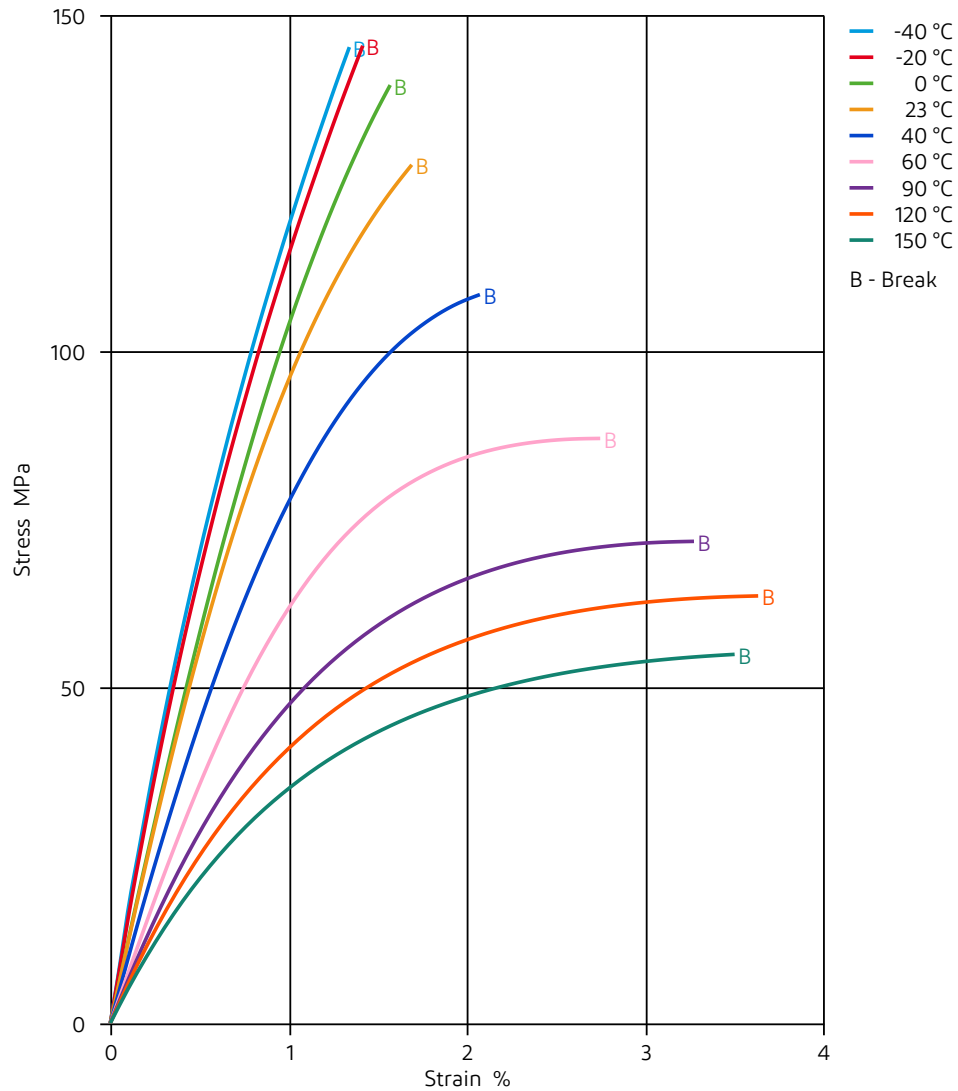




# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

Secant modulus-strain (dry)

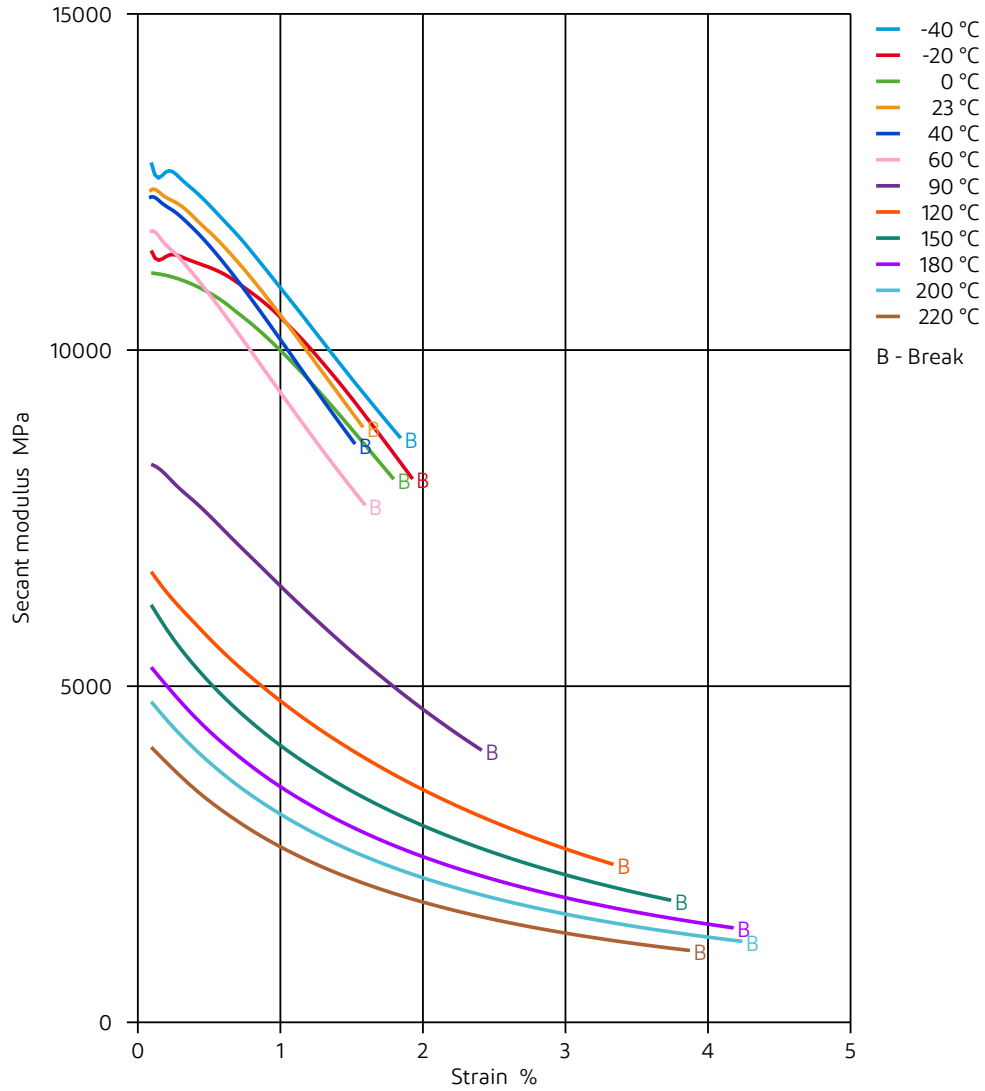




# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

## Secant modulus-strain (cond.)

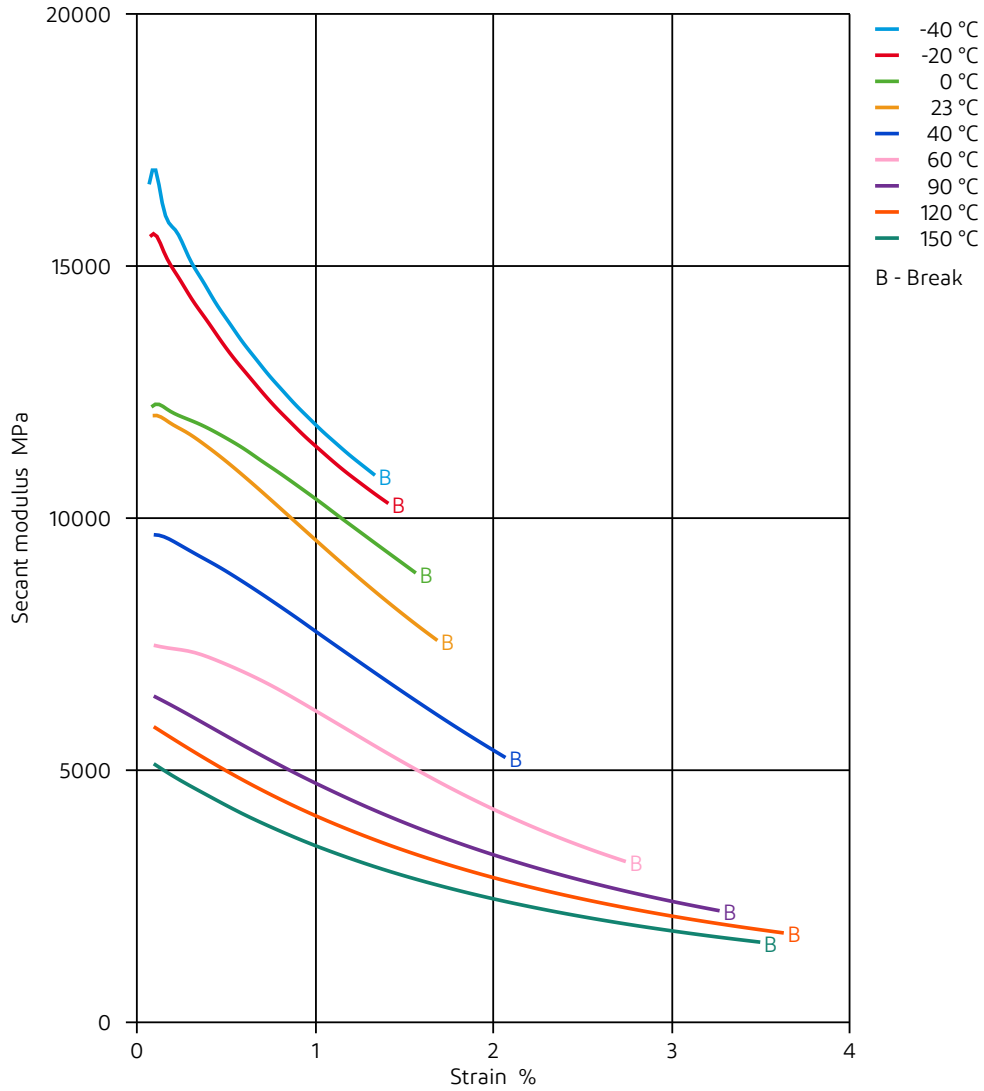




# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

HIGH PERFORMANCE POLYAMIDE RESIN

Tensile modulus-temperature (dry)

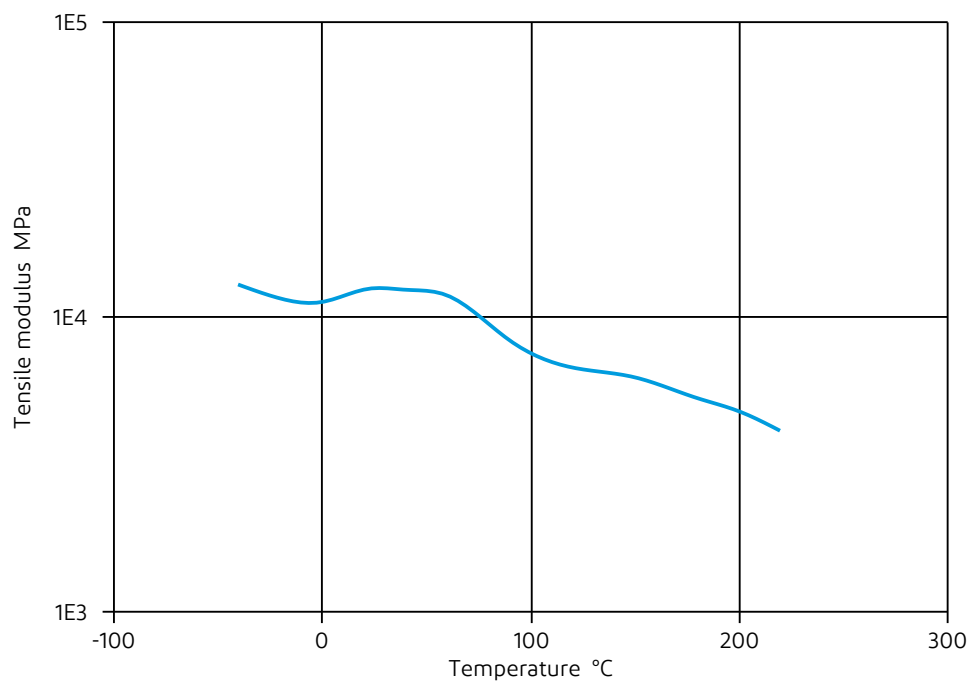






# Zytel® HTNFR52G35NHF BK337 (PRELIMINARY)

## HIGH PERFORMANCE POLYAMIDE RESIN

### Tensile modulus-temperature (cond.)

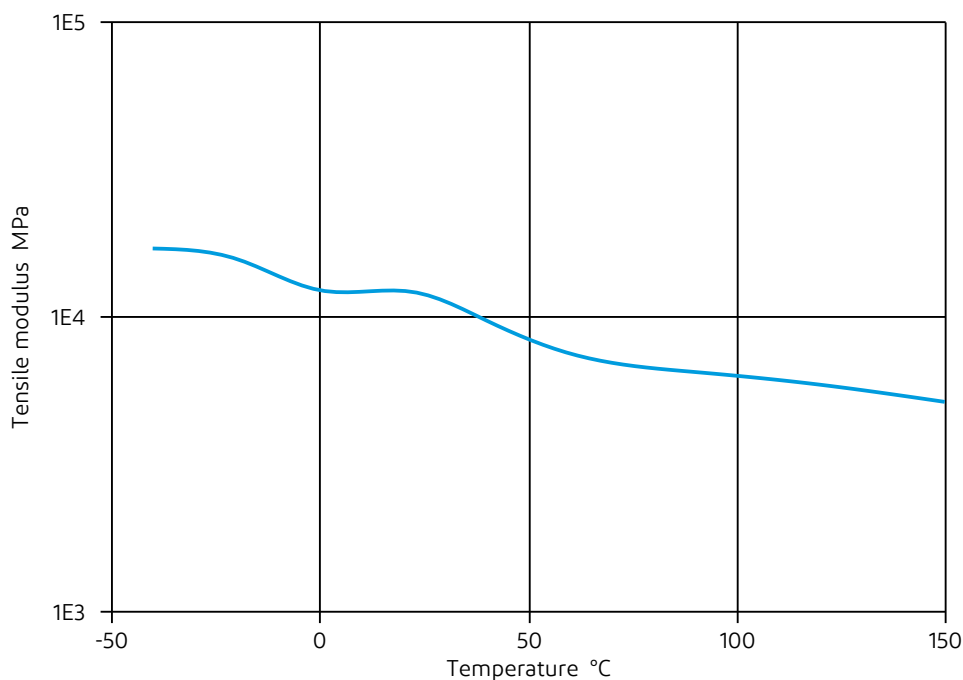

The above data are preliminary and are subject to change as additional data are developed on subsequent lots.

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

© 2021 DuPont. All rights reserved.