



# Delrin® 100T NC010

## ACETAL RESIN

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® 100T is a toughened, high viscosity acetal homopolymer with superior impact resistance. It is designed for highly stressed parts where outstanding toughness is required.

### Product information

Resin Identification	POM-I	ISO 1043
Part Marking Code	>POM-I<	ISO 11469

### Rheological properties

Melt volume-flow rate	1.9 cm <sup>3</sup> /10min	ISO 1133
Melt mass-flow rate	2.1 g/10min	ISO 1133
Temperature	190 °C	ISO 1133
Load	2.16 kg	ISO 1133
Melt mass-flow rate, Temperature	190 °C	ISO 1133
Melt mass-flow rate, Load	2.16 kg	ISO 1133
Moulding shrinkage, parallel	1.3 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.5 %	ISO 294-4, 2577

### Typical mechanical properties

Tensile Modulus	1900 MPa	ISO 527-1/-2
Yield stress	55 MPa	ISO 527-1/-2
Yield strain	25 %	ISO 527-1/-2
Nominal strain at break	>50 %	ISO 527-1/-2
Flexural Modulus	1700 MPa	ISO 178
Flexural Stress at 3.5%	52 MPa	ISO 178
Charpy impact strength, 23°C	N kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	26 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	14 kJ/m <sup>2</sup>	ISO 179/1eA
Hardness, Rockwell, M-scale	59 -	ISO 2039-2
Hardness, Rockwell, R-scale	113 -	ISO 2039-2
Poisson's ratio	0.41 -	



# Delrin® 100T NC010

## ACETAL RESIN

### Thermal properties

Melting temperature, 10°C/min	178 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	72 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	130 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 10N	173 °C	ISO 306
Coeff. of linear therm. expansion, parallel	120 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	120 E-6/K	ISO 11359-1/-2
Eff. thermal diffusivity	7.0E-8 m <sup>2</sup> /s	
RTI, electrical, 1.5mm	100 °C	UL 746B
RTI, electrical, 3mm	100 °C	UL 746B
RTI, impact, 1.5mm	85 °C	UL 746B
RTI, impact, 3mm	85 °C	UL 746B
RTI, strength, 1.5mm	85 °C	UL 746B
RTI, strength, 3mm	85 °C	UL 746B

### Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes -	UL 94
Glow Wire Flammability Index, 1mm	550 °C	IEC 60695-2-12
Glow Wire Flammability Index, 2mm	550 °C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	550 °C	IEC 60695-2-12
FMVSS Class	B -	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	42 mm/min	ISO 3795 (FMVSS 302)

### Electrical properties

Dissipation factor, 1MHz	90 E-4	IEC 62631-2-1
Volume resistivity	6E12 Ohm.m	IEC 62631-3-1
Comparative tracking index	600 -	IEC 60112

### Other properties

Humidity absorption, 2mm	0.3 %	Sim. to ISO 62
Water absorption, 2mm	0.9 %	Sim. to ISO 62
Density	1370 kg/m <sup>3</sup>	ISO 1183

### VDA Properties

Emissions	<8 <sup>[1]</sup> mg/kg	VDA 275
[1]: <5		

# Delrin<sup>®</sup> 100T NC010

## ACETAL RESIN

### Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	4 - 8 h
Processing Moisture Content	≤0.05 %
Melt Temperature Optimum	205 °C
Min. melt temperature	200 °C
Max. melt temperature	210 °C
Max. screw tangential speed	0.2 m/s
Mold Temperature Optimum	50 °C
Min. mould temperature	40 °C
Max. mould temperature	60 °C
Hold pressure range	60 - 80 MPa
Hold pressure time	7.5 s/mm
Annealing time, optional	30 min/mm
Annealing temperature	160 °C

### Extrusion

Drying Temperature	75 - 85 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.05 %
Melt Temperature Optimum	200 °C
Melt Temperature Range	195 - 205 °C

### Characteristics


Additives	Release agent
-----------	---------------



# Delrin<sup>®</sup> 100T NC010

ACETAL RESIN

Viscosity-shear rate

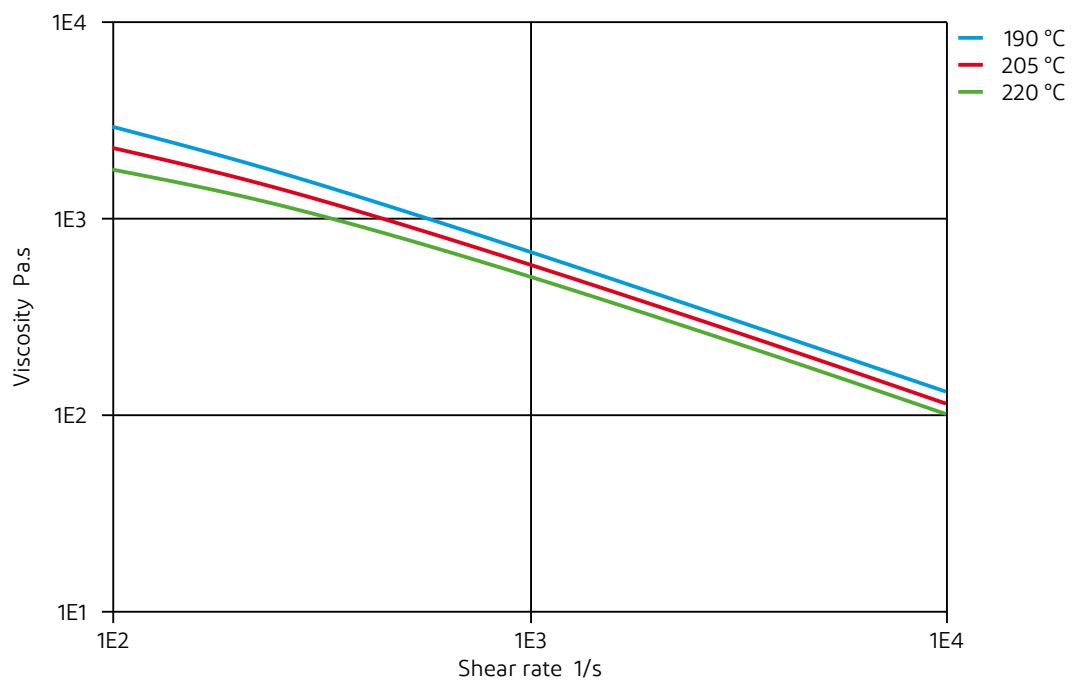




# Delrin<sup>®</sup> 100T NC010

ACETAL RESIN

Shearstress-shear rate

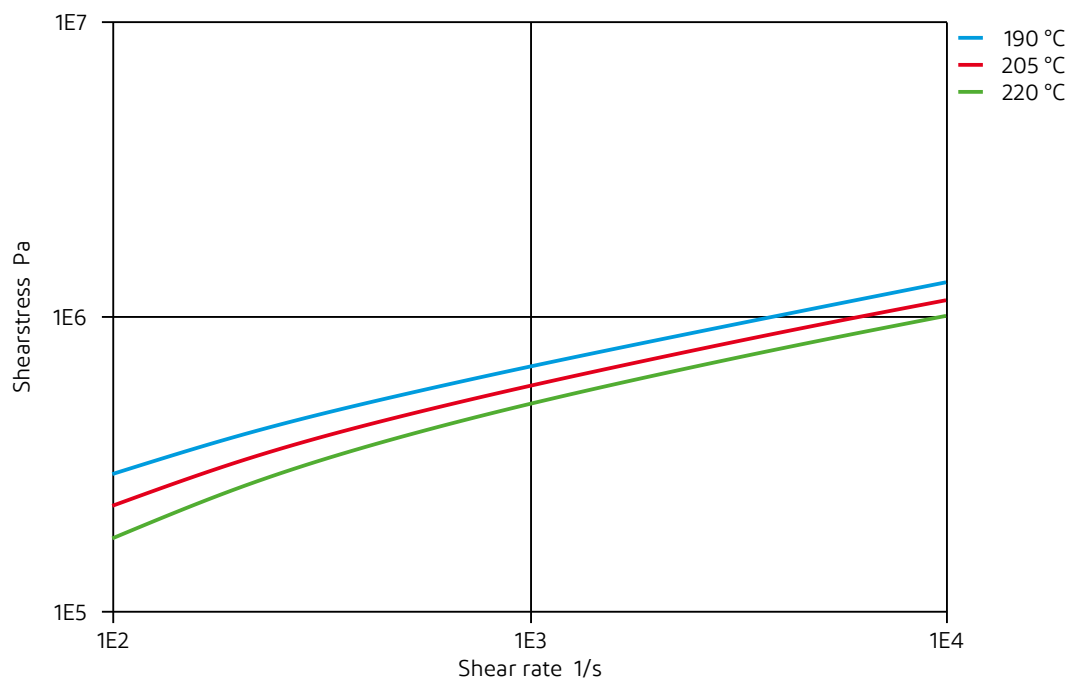




# Delrin<sup>®</sup> 100T NC010

ACETAL RESIN

## Stress-strain

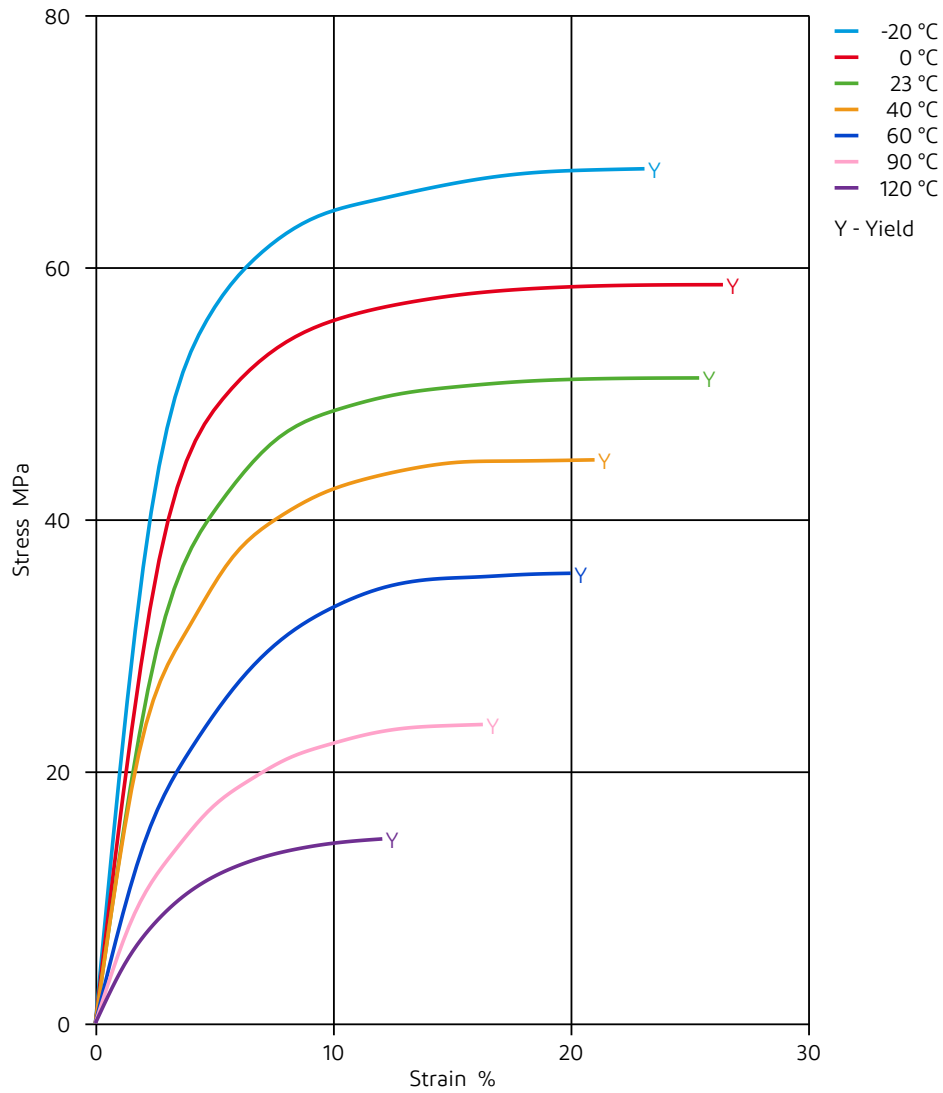




# Delrin<sup>®</sup> 100T NC010

ACETAL RESIN

## Secant modulus-strain

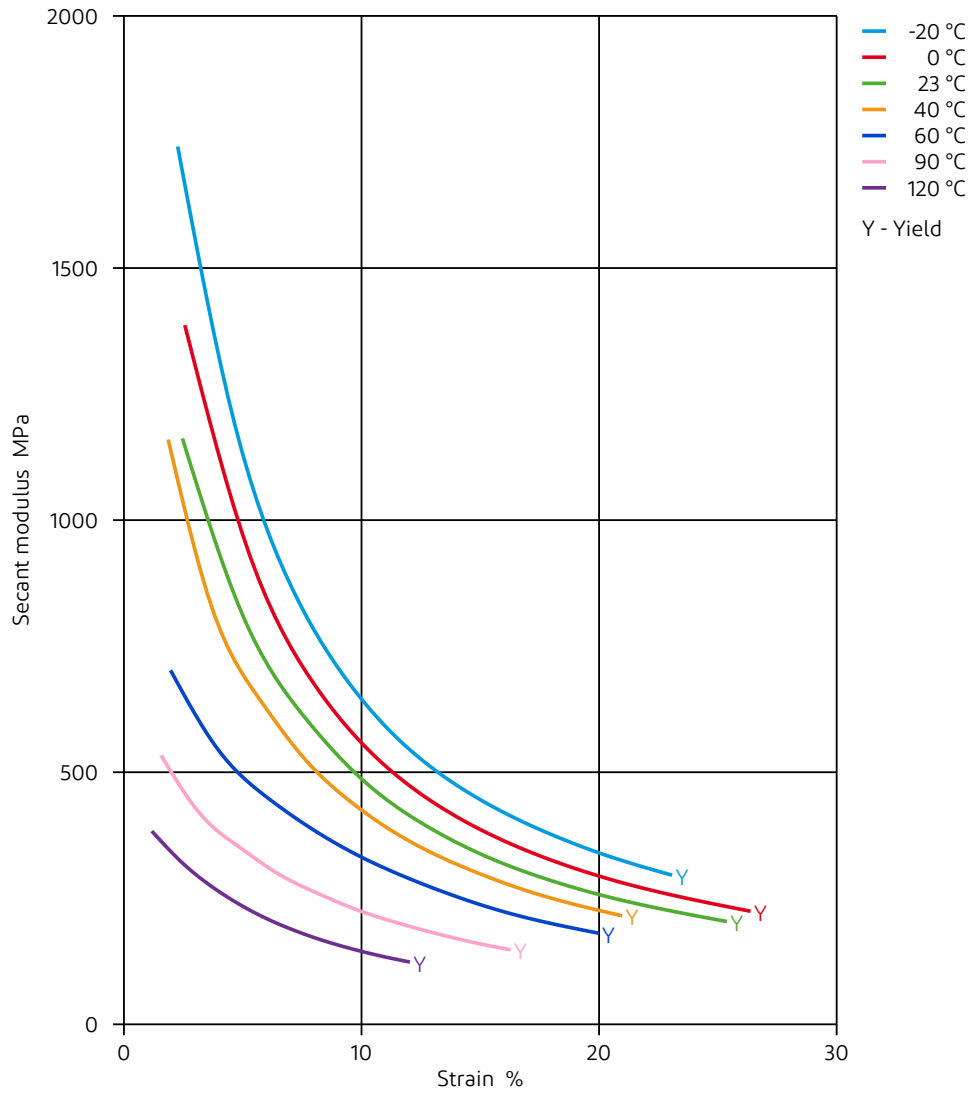




# Delrin<sup>®</sup> 100T NC010

ACETAL RESIN

Specific volume-temperature (pvT)

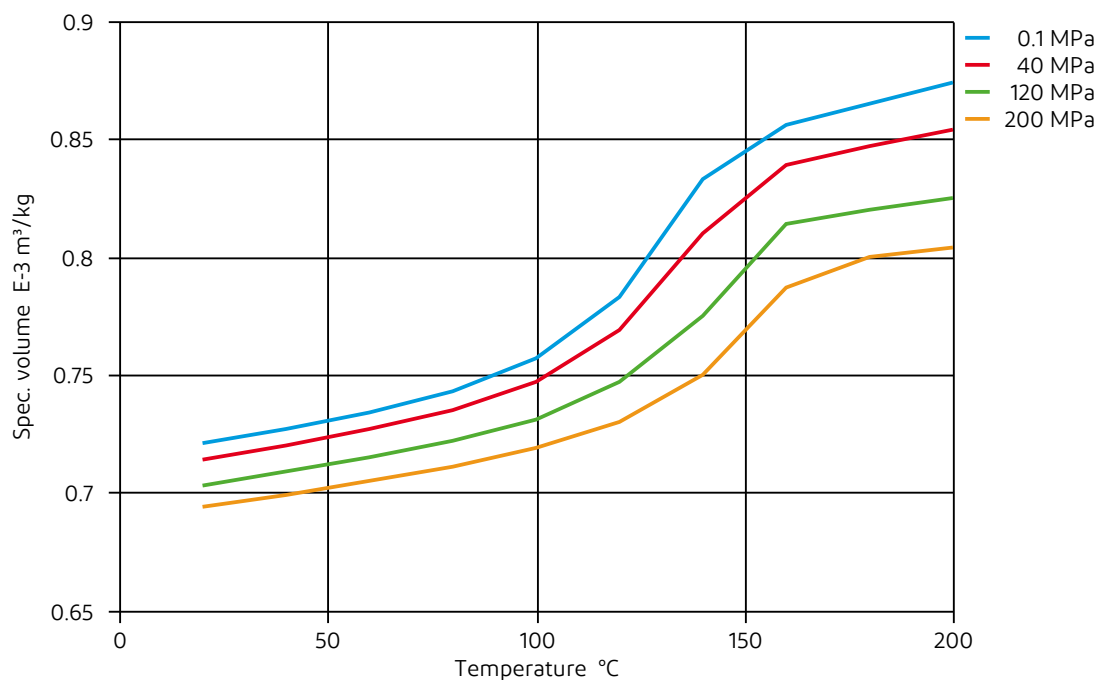

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.